

ADL-150-12 series

150W Enclosed Type Switching Power Supply



■ Features:

- Constant voltage design
- Universal AC input / Full range
- Protections: Short circuit / Overload
- Cooling by free air convection
- Low price



ELECTRICAL SPECIFICATION

MODEL	ADL-150-12
OUTPUT	
Rated Voltage	12V
Rated Current	12.5A
Rated Power	150W
Voltage Adjustment – potentiometer VIP1	10.8 ÷ 13.2V
Line Regulation	± 1%
Load Regulation	± 2%
Tolerance [3]	± 5%
Ripple & Noise (max.) [2]	180mV _{p-p}
Setup, Rise Time [4]	200ms, 30ms / 230VAC at full load
Hold up Time	10ms / 230VAC at full load
INPUT	
Voltage Range	105 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efficiency (typ.)	80%
AC Current (typ.)	2.5A / 115VAC, 1.25A / 230VAC
PROTECTIONS	
Overload	Range: 105 ÷ 150% rated current
	Type: constant current limiting to 60% rated voltage next hiccup mode. Recovers automatically after fault condition is removed.
Short Circuit	Type: hiccup mode, Re-power on to recovery.

ADL-150-12 series

150W Enclosed Type Switching Power Supply



WORKING ENVIRONMENT

Working Temperature	-10°C ÷ 50°C
Working Humidity	20 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-40°C ÷ 85°C, 10 ÷ 95% RH non-condensing

SAFETY AND EMC REGULATIONS


Safety Standards	Compliance to EN60950-1
Withstand Voltage	I-P/O-P: 1.5kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
EMC Emission	Zgodność z EN55015
EMC Immunity	Zgodność z EN61547
Harmonic Current	Zgodność z EN61000-3-3; EN61000-3-2

OTHERS


Lifetime	12 000Hrs for input 230VAC, 20°C ambient temperature, full load
Dimensions	199 x 98 x 42mm (L x W x H)
Weight and Packing	0.51kg; 28pcs./ctn; ctn weight and dimensions: 15.9kg; 46 x 39.3 x 27cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

MECHANICAL SPECIFICATION

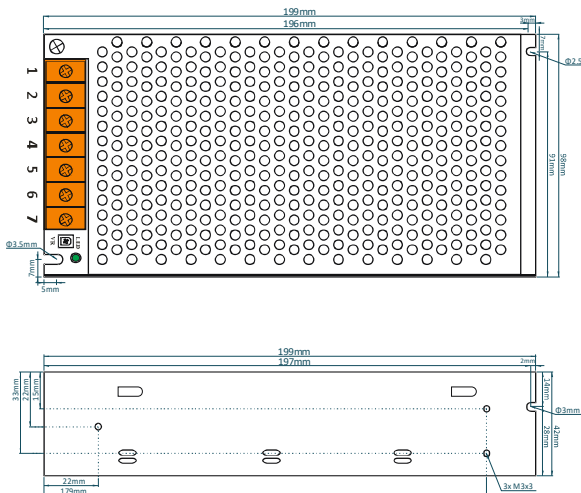

DERATING CURVE

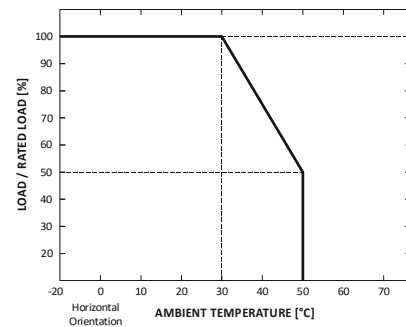

TERMINAL PIN NO. ASSIGNMENT

PIN No.	Assignment	PIN No.	Assignment
1	Input: AC/L	4,5	Output: -V
2	Input: AC/N	6,7	Output: +V
3	Frame Ground: GND	VR	Output voltage adjustment
		LED	Power On indicator